DS019180

RHF0M0E5 Product Specification datasheet

V1.6

Document information


Info	Content
Keywords	*RisingHF, LoRaWAN®, Module, ultra small size, AT command*
Abstract	This document is the technical specification of RHF0M0E5 module

Content

Content 2
1 Introduction 1
1.1 Feature 1
2 Description 1
2.1 Pin definition 2
3 Electrical characteristics 3
3.1 Extreme working conditions 3
3.2 Normal working conditions 3
3.3 Module specifications 3
4 Typical RF performance test 4
4.1 RHF0M0E5-LF22 Performance Testing 4
4.2 RHF0M0E5-HF14/HF22 Performance Testing 7
5 Application information 12
5.1 Package information 12
5.2 External interface of the module 13
5.3 Reference design based on RHF0M0E5 module 13
6 LoRaWAN® application information 13
6.1 LoRaWAN® application 13
6.2 Design LoRaWAN® wireless sensor based on RHF0M0E5 14
7 Ordering information 14
8 Revision 15

1 Introduction

RHF0M0E5 is a low-cost, ultra-low power, ultra-small size LoRaWAN® module designed by RisingHF Network (Shenzhen) Co., Ltd. The module uses ST system on chip STM32WLE5, integrated high-performance LoRa® SX126X IP and ultra-low power Consumption of MCU. The target application of this module is wireless sensor networks and other Internet of Things devices, especially battery-powered low power consumption and long-distance occasions.
This specification mainly describes the hardware information, hardware performance and application information of the module.
RHF0M0E5 LoRaWAN® module is mainly suitable for long-distance, ultra-low-power applications such as wireless meter reading, sensor networks, and other low-power wide-area IoT scenarios.

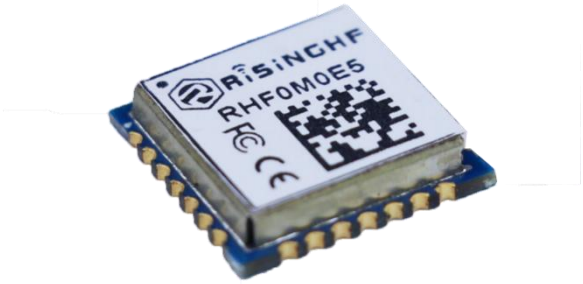

1.1 Feature

- Low power consumption: as low as 2.1uA sleep current (WOR mode)
- low cost:
- Small size: 12mm X 12mm * 2.5mm 28 pins SMT
- High performance:
  - ✓ RHF0M0E5-LF22 TXOP=22dBm@434/470MHz
  - ✓ RHF0M0E5-HF14: TXOP=14dBm@868MHz
  - ✓ RHF0M0E5-HF22: TXOP=22dBm@868/915MHz
  - ✓ -136.5dBm sensitivity for SF12 with 125KHz BW
  - ✓ 158dB link budget, suitable for long distance
- interface
  - ✓ USART
  - ✓ I2C
  - ✓ ADC
  - ✓ SWD
- Embedded LoRaWAN® protocol, AT command, support global LoRaWAN® frequency plan
  - ✓ EU868
  - ✓ US915 and US915 Hybrid
  - ✓ CN779
  - ✓ AU915
  - ✓ CN470 and CN470 Prequel
  - ✓ AS923
  - ✓ KR920
  - ✓ IN865

This product specification includes a detailed description of the RHF0M0E5 module's performance and functions. For the latest firmware, product updates or errata, please contact RisingHF.

2 Description

RHF0M0E5 is embedded with high-performance STM32WLE5, which is very suitable for the design of various IoT nodes.
The RHF0M0E5 module supports (G) FSK mode and LoRa®. 62.5kHz, 125kHz, 250kHz and 500kHz bandwidth can be used in LoRa® mode.
Based on the powerful functions and rich peripherals of STM32WLE5, the module provides UART, I2C, SPI, ADC and GPIOs for users to choose according to the application. If you need to upgrade the built-in AT command firmware, please use the two-wire interface (UART) to complete the programming based on the boot mode; and customers can develop the software based on the internal MCU of the module to complete the program erasure and programming through SWD.
RHF0M0E5 currently contains three sub-models, RHF0M0E5-LF22, RHF0M0E5-HF14 and RHF0M0E5-HF22, RHF0M0E5-LF22 supports 22dBm @ LF band (434/470MHz); RHF0M0E5-HF14 supports 14dBm @ HF band (868 MHz)；RHF0M0E5-HF22 supports 22dBm @ HF band (868/915 MHz).

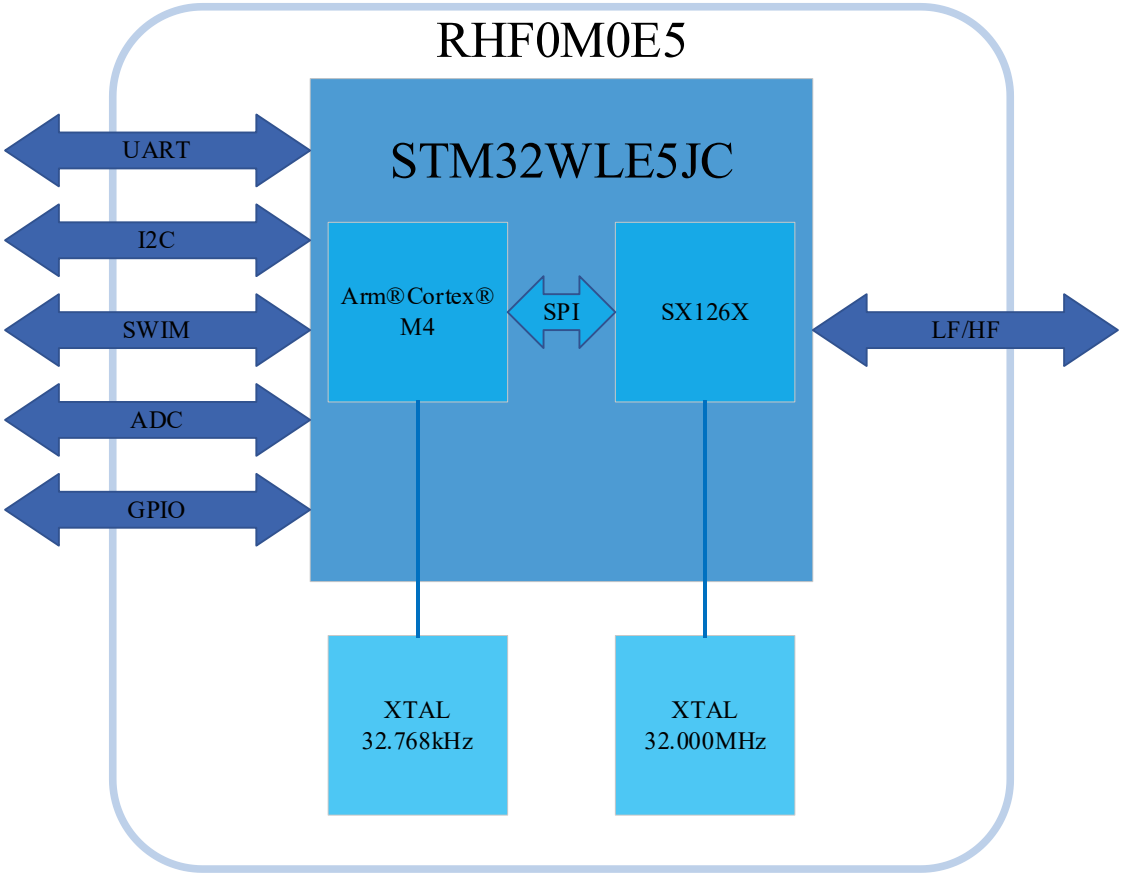


Figure 1 RHF0M0E5 Schematic diagram

2.1 Pin definition

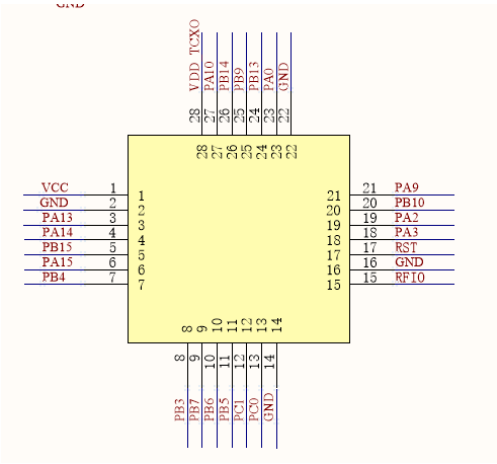


Figure 2 RHF0M0E5 Pin arrangement

Table 1 RHF0M0E5 pinout

Number	Name	Type	Description
1	VCC	-	Supply voltage for the module
2	GND	-	Ground
3	PA13	I	SWDIO of SWIM for program download
4	PA14	I/O	SWCLK of SWIM for program download
5	PB15	I/O	SCL of I2C2 from MCU
6	PA15	I/O	SDA of I2C2 from MCU
7	PB4	I/O	MCU GPIO
8	PB3	I/O	MCU GPIO
9	PB7	I/O	UART1_RX from MCU
10	PB6	I/O	UART1_TX from MCU
11	PB5	I/O	MCU GPIO
12	PC1	I/O	MCU GPIO；LPUART1_TX from MCU
13	PC0	I/O	MCU GPIO；LPUART1_RX from MCU
14	GND	-	Ground
15	RFIO	I/O	RF input/output
16	GND	-	Ground
17	RST	I/O	Reset trigger input for MCU
18	PA3	I/O	MCU GPIO；USART2_RX from MCU
19	PA2	I/O	MCU GPIO；USART2_TX from MCU
20	PB10	I/O	MCU GPIO
21	PA9	I/O	MCU GPIO
22	GND	-	Ground

23	PA0	I/O	MCU GPIO
24	PB13	I/O	SPI2_SCK from MCU; Boot pin(Active low)
25	PB9	I/O	SPI2_NSS from MCU
26	PB14	I/O	SPI2_MISO from MCU
27	PA10	I/O	SPI2_MOSI from MCU
28	PB0	I/O	Unavailable；Suspended treatment

3 Electrical characteristics

3.1 Extreme working conditions

Reaching or exceeding the maximum ratings listed in the table below can cause equipment damage.

Table 2 Absolute Maximum Ratings

Item	Description	min	max	unit
VCCmr	Supply voltage	-0.3	+3.9	V
Tmr	Ambient temperature	-40	+85	℃
Pmr	RF input power	-	+10	dBm

3.2 Normal working conditions

Table 3 Recommended Operating Conditions

Item	Description	min	max	unit
VCCop	Supply voltage	+1.8	+3.6	V
Top	Ambient temperature	-40	+85	℃
Pop	RF input power	-	+10	dBm

3.3 Module specifications

Table 4 RHF0M0E5 features

ITEMs	Parameter	Specifications	Unit
Structure	Size	12(W) X 12(L) X 2.5(H)	mm
	Package	28 pins, SMT	
Electrical Characteristics	power supply	3.3V type	V
	Sleep current	2.1uA (WDT on);	uA
	Operation current (Transmitter + MCU)	50mA @10dBm in 434MHz typical value	mA
		111mA @22dBm in 470MHz typical value	
		26mA @14dBm in 868MHz typical value only for RHF0M0E5-HF14	
		118mA @22dBm in 868/915MHz typical value	

	Operation current (Receiver + MCU)	6.7mA @BW125kHz, 434MHz typical value				mA
		6.7mA @BW125kHz, 470MHz typical value				
		6.7mA @BW125kHz, 868/915MHz typical value				
	Output power	22dBm max @434/470MHz				dBm
		14dBm max @868MHz only for RHF0M0E5-HF14				
		22dBm max @868/915MHz				
	Sensitivity	@SF12, BW125kHz				dBm
		Fr(MHz)	min	type	max	
		434	-	-134.5	-136	
		470	-	-136.5	-137.5	
		868	-	-135	-137	
		915	-	-135	-137	
	Harmonics	<-36dBm below 1GHz				dBm
		<-40dBm above 1GHz				dBm
Interface	RFIO	RF port				
	UART	3 group of UART, include 2pins				
	I2C	1 group of I2C, include 2 pins				
	ADC	1 ADC Input, include 1pins,12-bit 1Msps				
	NRST	Manual reset pin input				
	SPI	1 group of SPI, include 4 pins				

4 Typical RF performance test

4.1 RHF0M0E5-LF22 Performance Testing

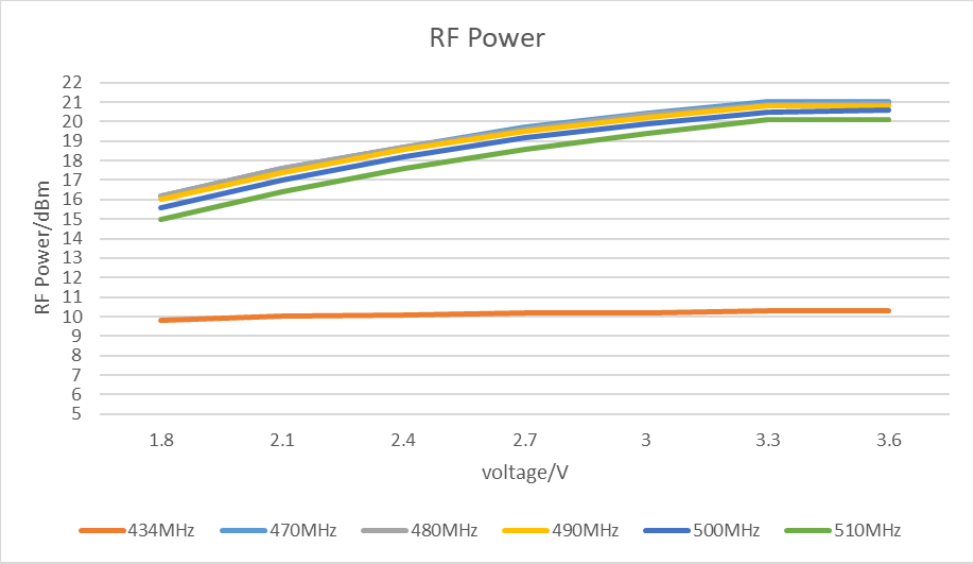


Figure 3 RF Power vs Voltage（434~510MHz）

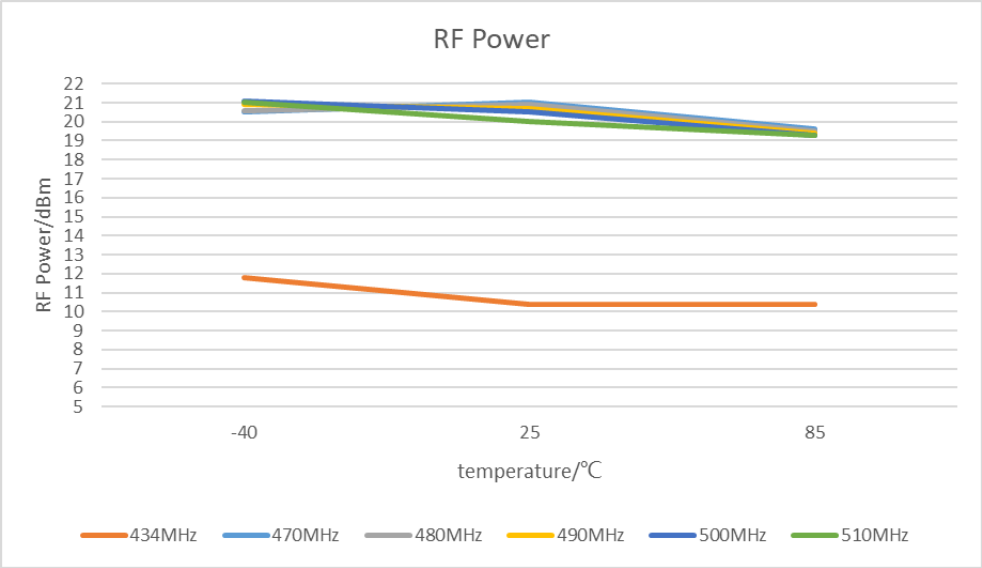


Figure 4 RF Power VS Temperature（434~510MHz）

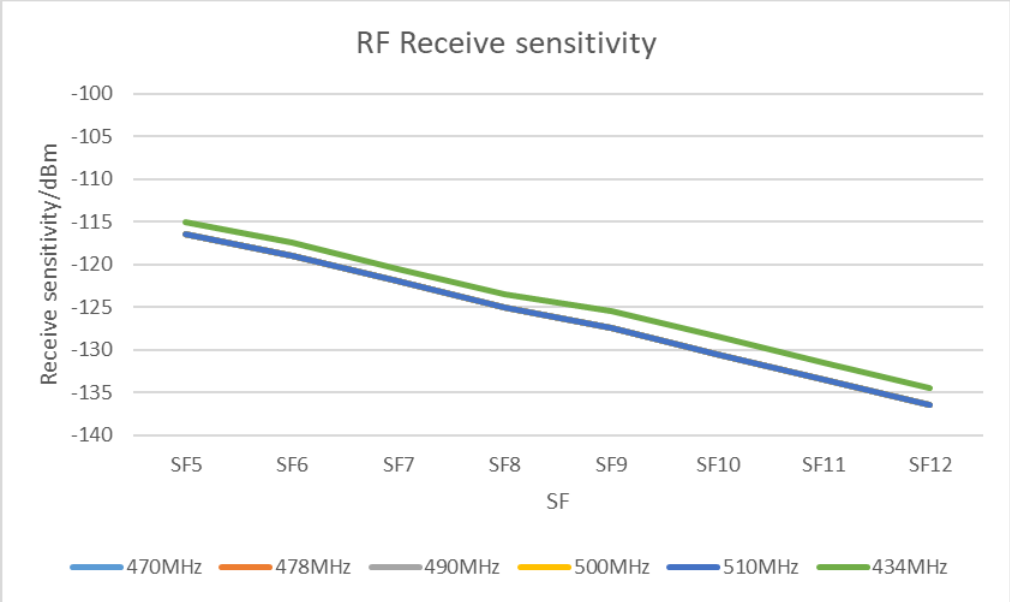


Figure 5 RF Receiver Sensitivity vs Spreading factor（434~510MHz）

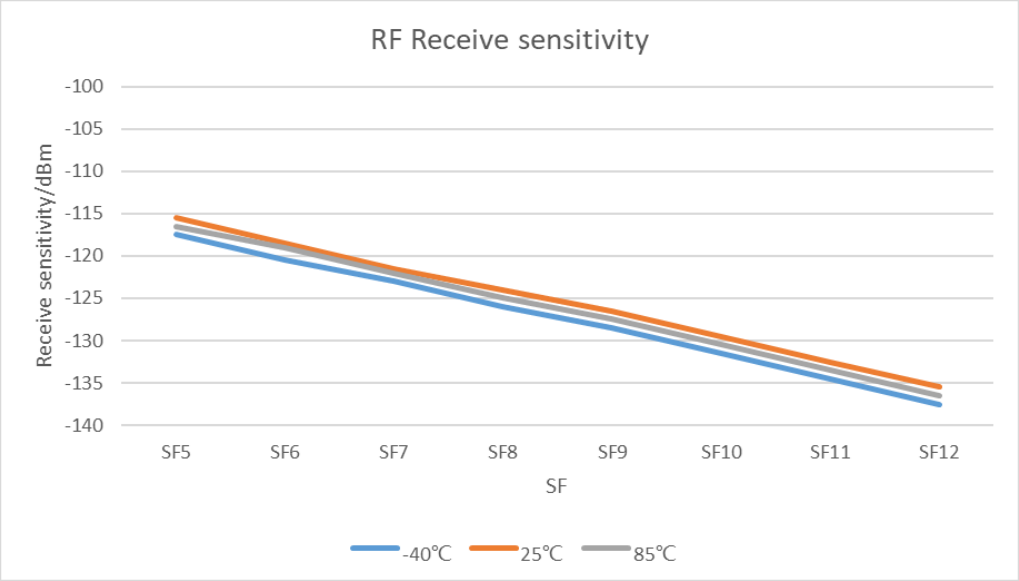


Figure 6 RF Receiver Sensitivity VS Temperature（470MHz）

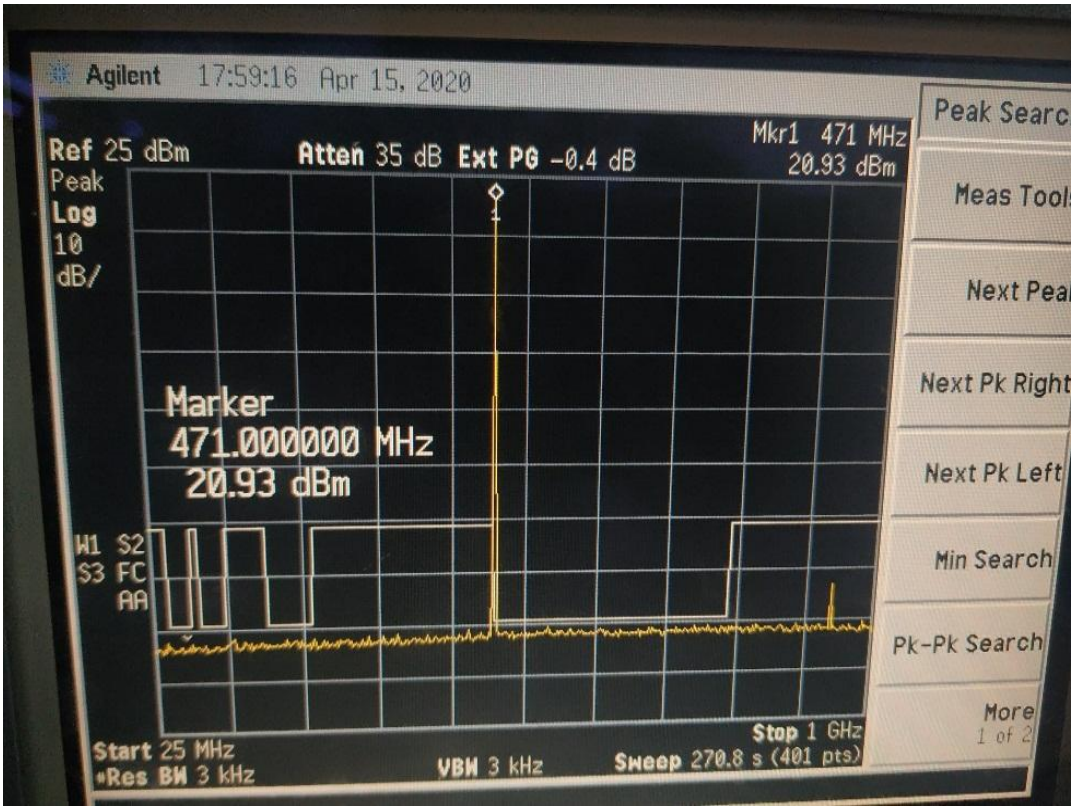


Figure 7 Harmonic(25MHz~1GHz)@Frf=470MHz, TXOP=22dBm

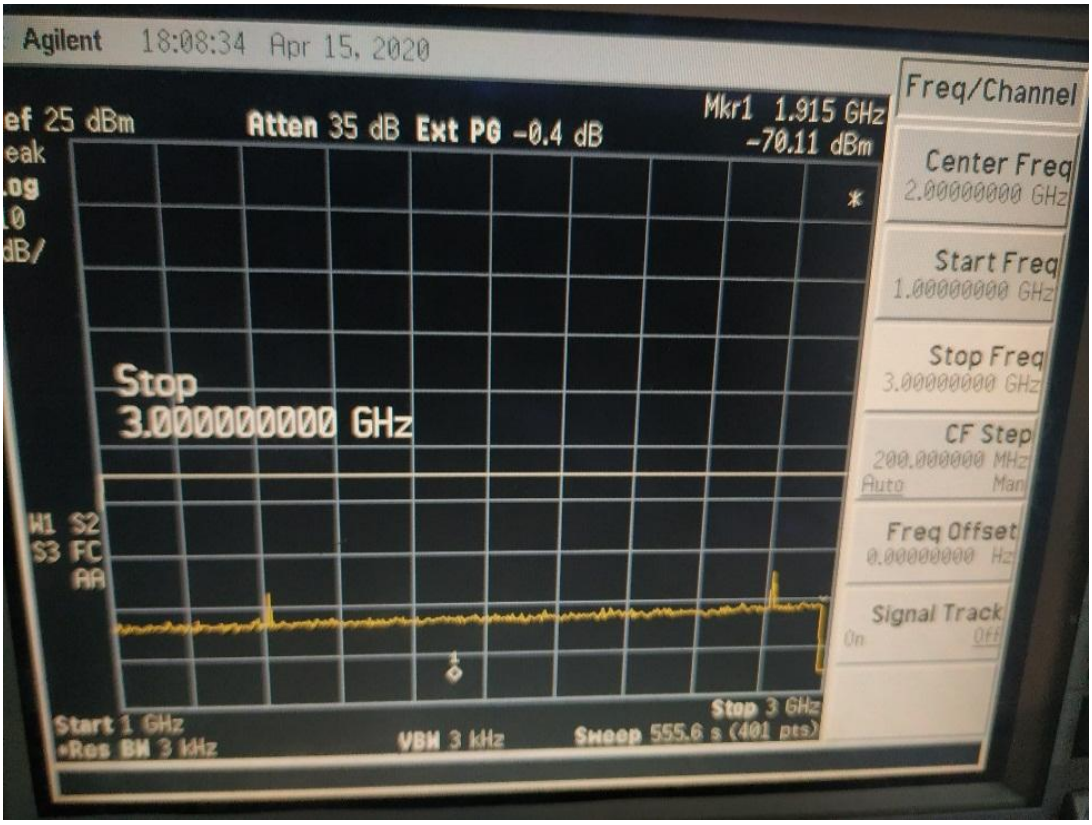


Figure 8 Harmonic(1GHz~3GHz)@Frf=470MHz, TXOP=22dBm

4.2 RHF0M0E5-HF14/HF22 Performance Testing

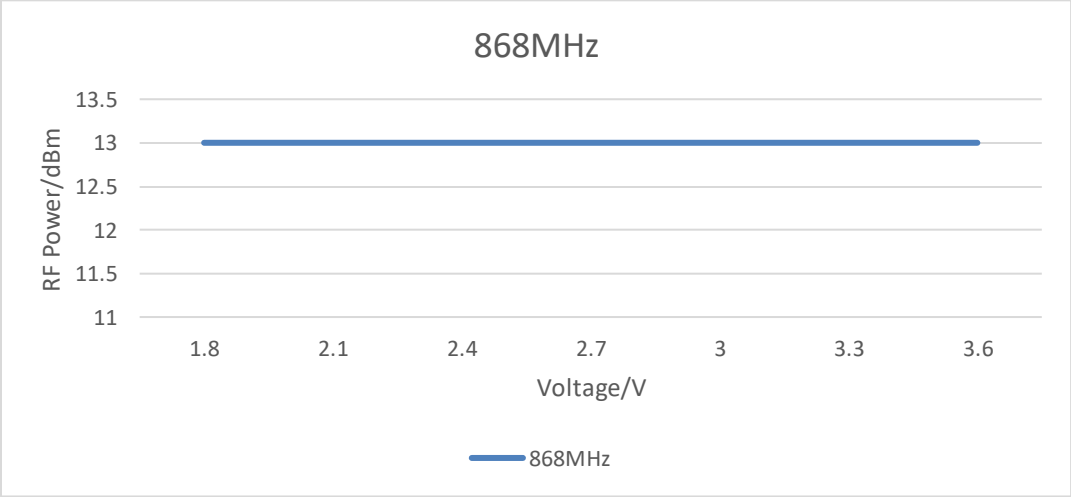


Figure 9 RF Power vs Voltage（868MHz）only for RHF0M0E5-HF14

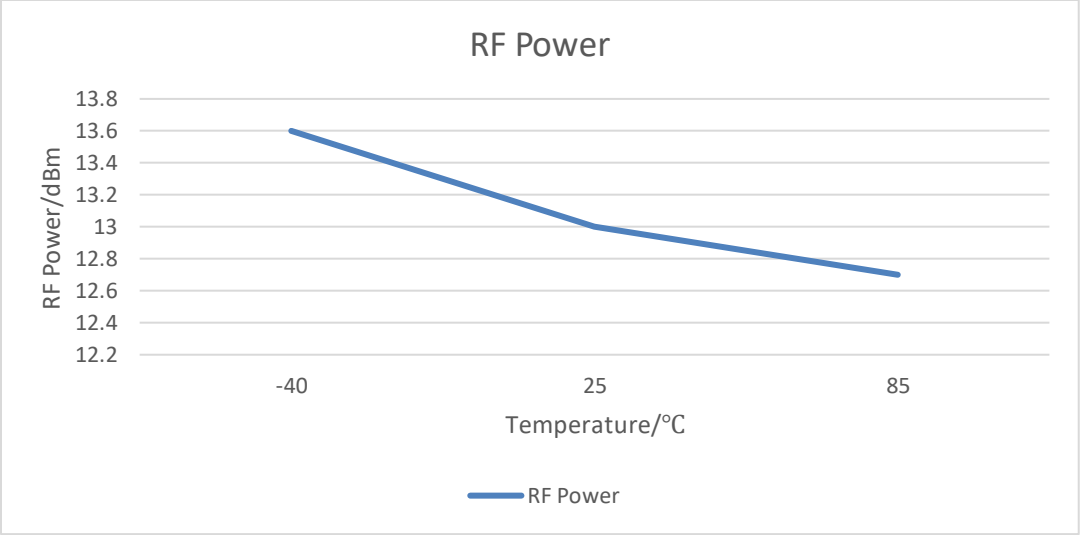


Figure 10 RF Power VS Temperature（868MHz）only for RHF0M0E5-HF14

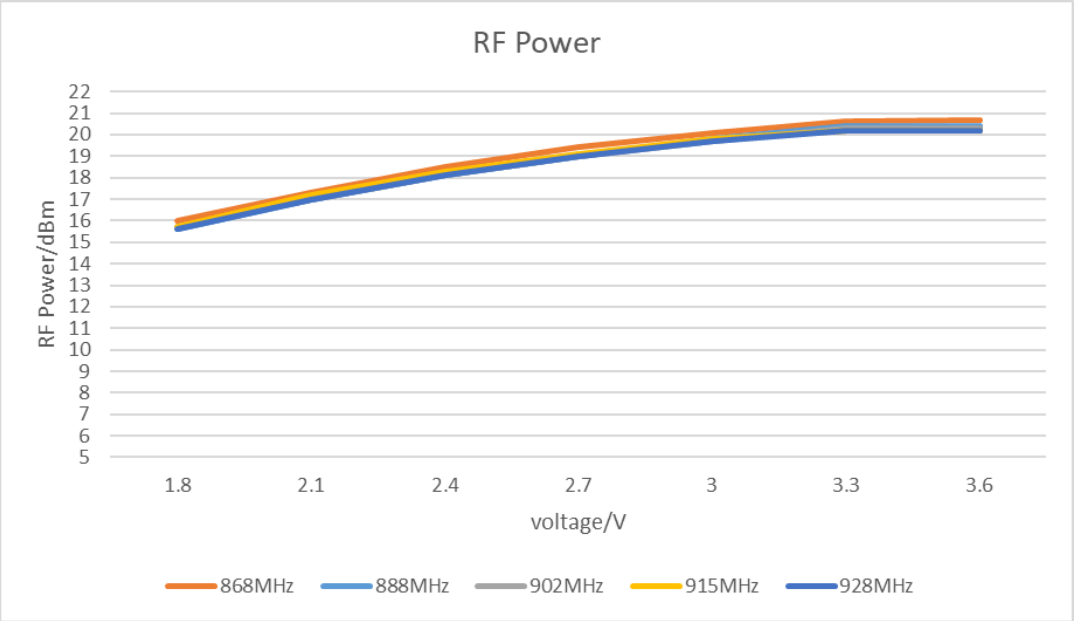


Figure 11 RF Power vs Voltage（868~928MHz）

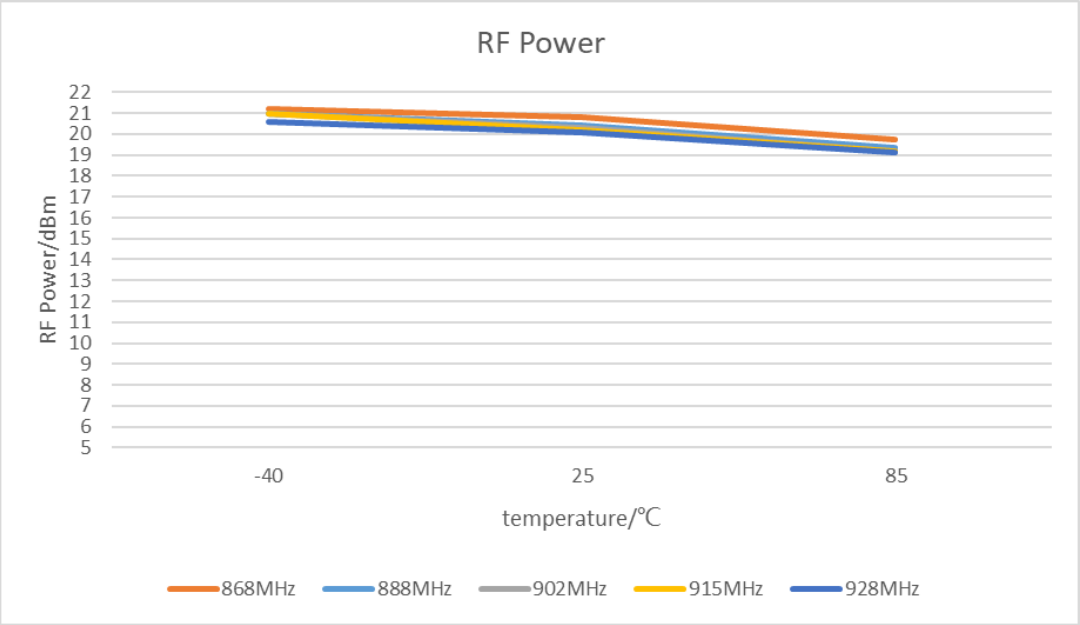


Figure 12 RF Power VS Temperature（868~928MHz）

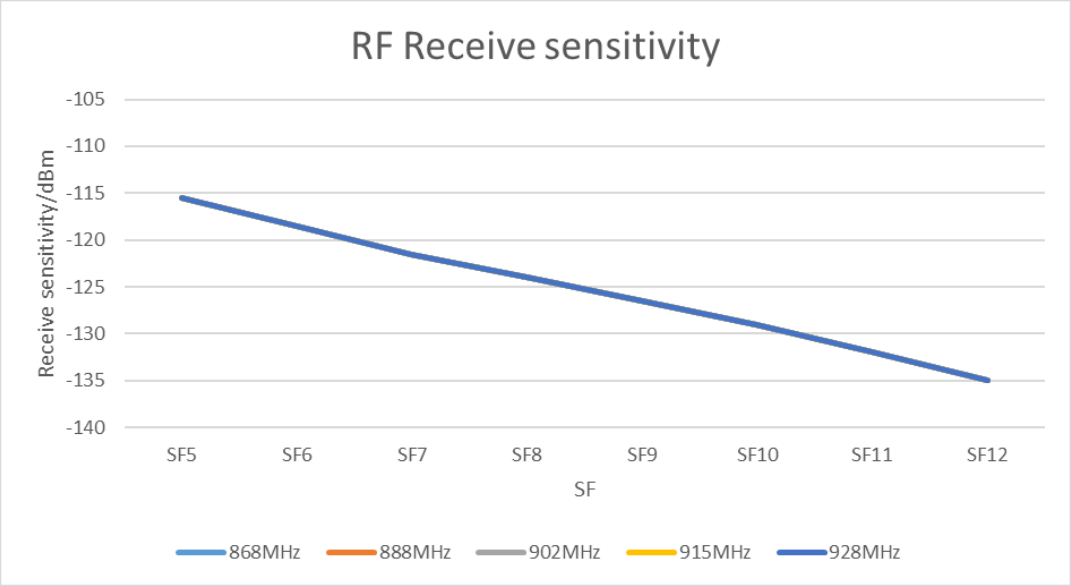


Figure 13 RF Receiver Sensitivity vs Spreading factor（868~928MHz）

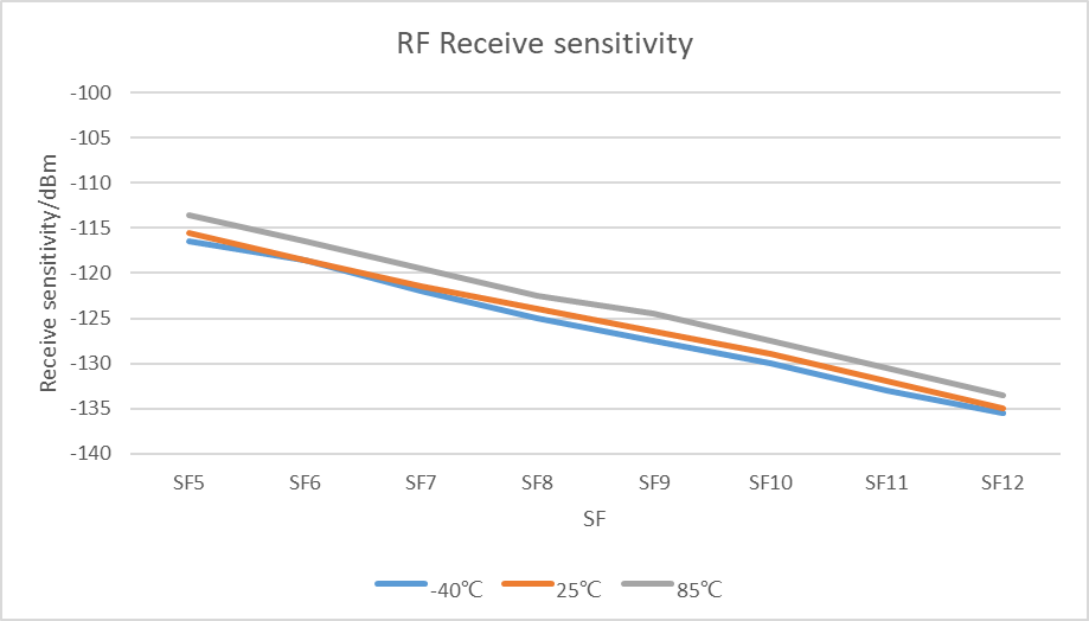


Figure 14 RF Receiver Sensitivity VS Temperature（868MHz）

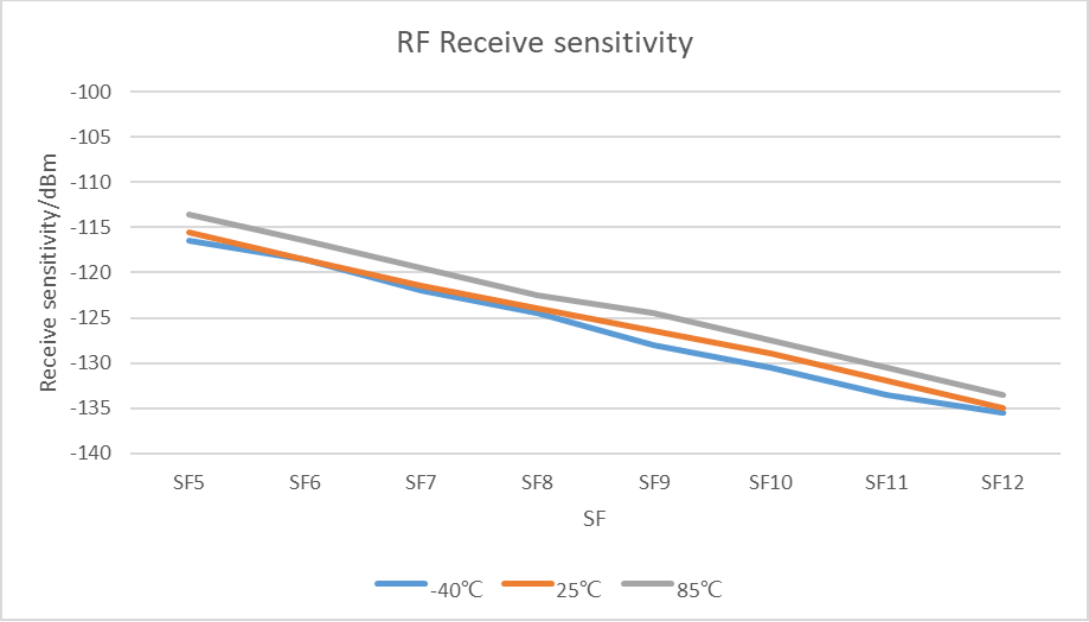


Figure 15 RF Receiver Sensitivity VS Temperature（915MHz）

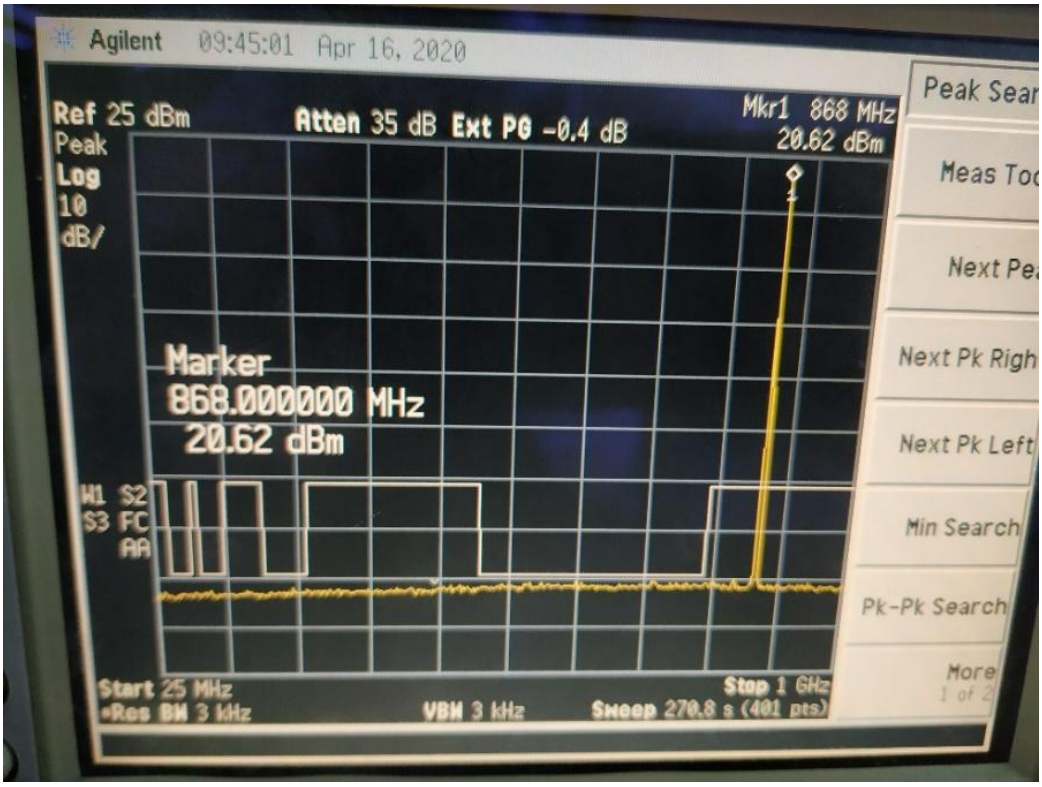


Figure 16 Harmonic(25MHz~1GHz)@Frf=868MHz, TXOP=22dBm

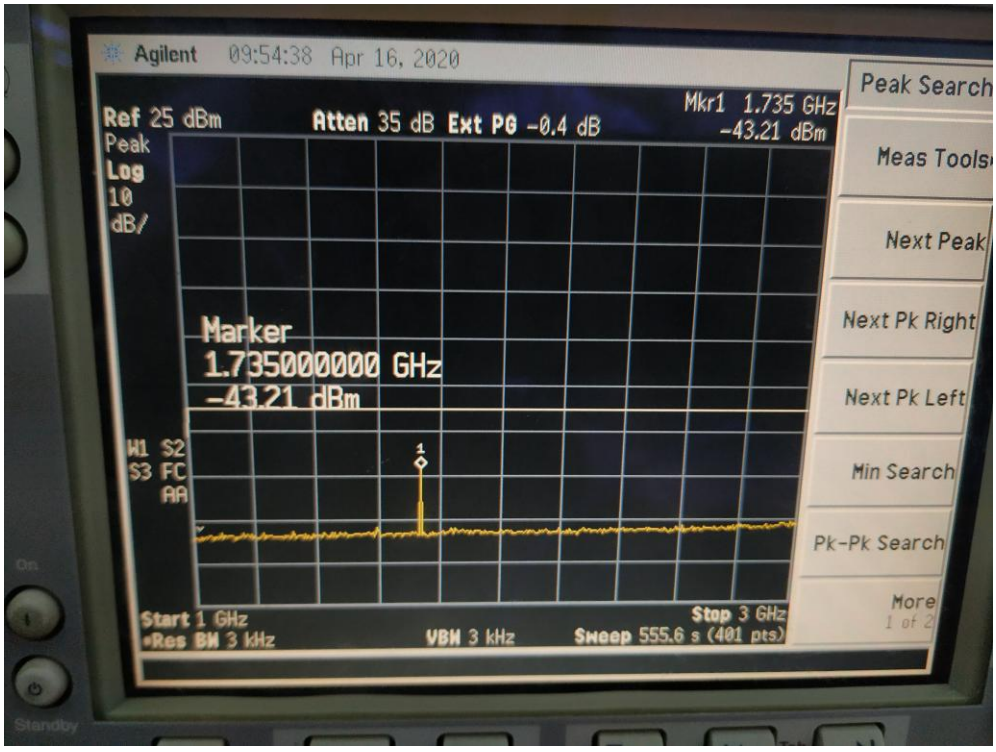


Figure 17 Harmonic(1GHz~3GHz)@Frf=868MHz, TXOP=22dBm

5 Application information

5.1 Package information

Unless specified dimension tolerance, the Dimension below will be with tolerance ±0.1mm, all the dimension unit is mm.

RHF0M0E5 has a 28-pin SMD package:

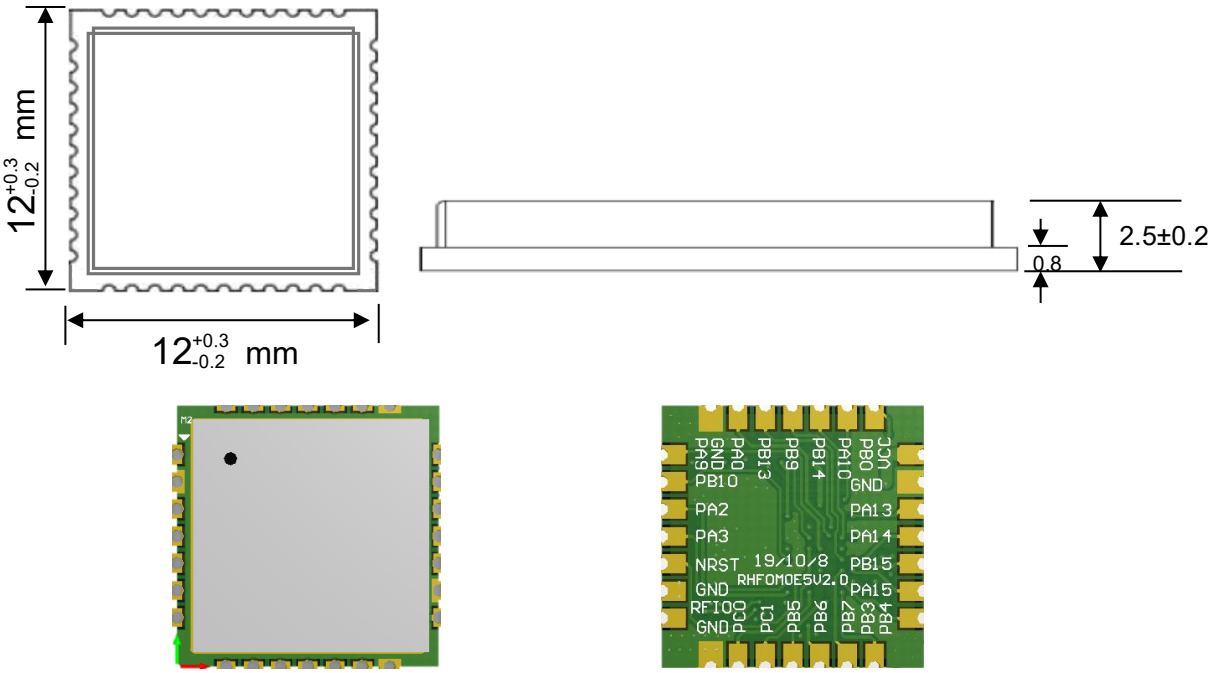


Figure 18 RHF0M0E5 Module appearance

The following figure shows the recommended Layout package dimensions.

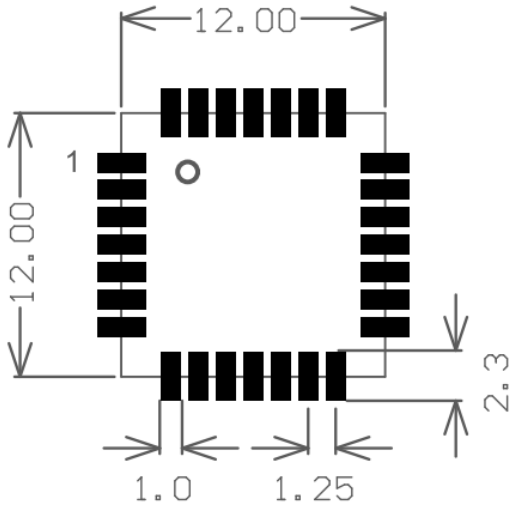


Figure 19 PCB footprint

5.2 External interface of the module

In addition to several necessary GPIO ports and a set of SPI ports used for internal RF transceiver control, other GPIOs of the MCU have been derived, including UART (for AT commands), I2C, ADC, etc. For customers who want to develop software or expand peripherals on the MCU of the module, these rich GPIO interfaces can satisfy most application requirements.

5.3 Reference design based on RHF0M0E5 module

RHF0M0E5 embeds the global LoRaWAN® protocol and AT instruction set. This will make the design of LoRaWAN® nodes based on this module very easy. The following is a typical reference design that uses RHF0M0E5 to quickly start a LoRaWAN® application. Just connect UART and NRST to the host MCU and send AT commands.

In addition,Pin24 grounding of the module will force the module to enter Boot upgrade mode.

Note: The 28-pin PB0 must be left floating and not allowed to be pulled up or grounded.

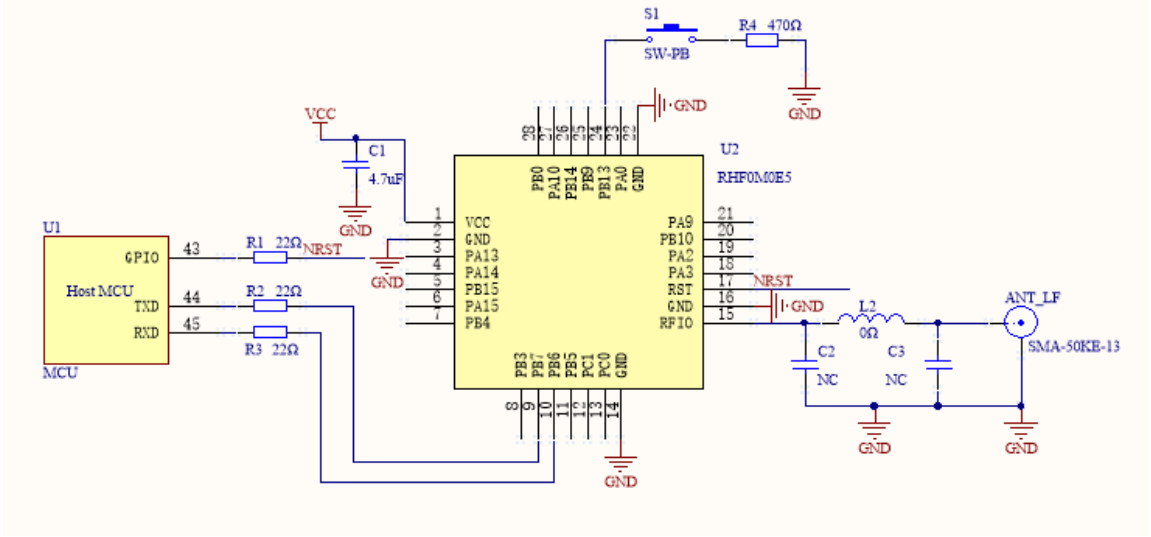


Figure 20 Reference design based on RHF0M0E5

6 LoRaWAN® application information

6.1 LoRaWAN® application

The topology of the LoRaWAN® network is a star network, and the gateway acts as a relay between nodes and network servers. The gateway is connected to the network server through a standard IP link, and the node device uses LoRa® or FSK to communicate with one or more gateways. Communication is bidirectional, although it is mainly upstream communication from the node to the network server. The communication between the node and the gateway uses different frequencies and rates. The choice of rate is a compromise between power consumption and distance, and different rates do not interfere with each other. According to different spreading factors and bandwidths, the rate of LoRa® can be from 300bps to 50Kbps. In order to maximize battery life and network capacity, the network server manages the node's rate and output power through rate adaptation (ADR).

The node device may transmit on a random channel at any time and at any rate, as long as the following conditions are met:

1) The channel currently used by the node is pseudo-random. This makes the system more resistant to interference

2) The maximum transmission time (dwell time of the channel) and duty cycle of the node depends on the frequency band used and local regulations

RHF0M0E5 module integrates ST ultra-low power IC STM32WLE5. The current is only 2.1uA in sleep mode, this module is very suitable for various applications of LoRaWAN®.

6.2 Design LoRaWAN® wireless sensor based on RHF0M0E5

RHF0M0E5 is an AT instruction set that encapsulates the global LoRaWAN® standard protocol. The customer only needs a very simple MCU as the main control, and can control the RHF0M0E5 through the serial port, thereby easily implementing the LoRaWAN® protocol. This helps customers quickly bring sensor products to the LoRaWAN® market.

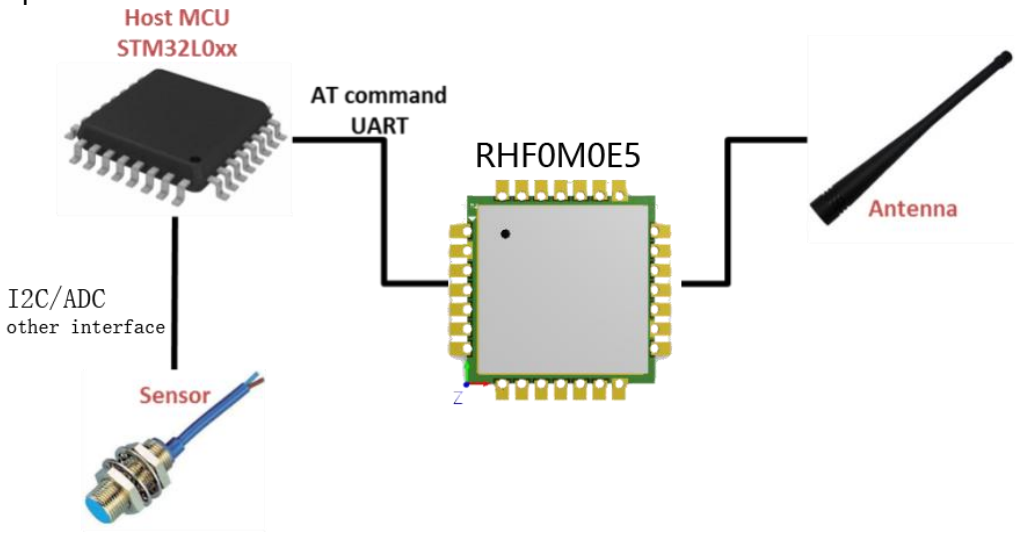


Figure 21 Design of LoRaWAN® wireless sensor based on RHF0M0E5 module

7 Ordering information

Technical Support: support@risinghf.com
Sales:
China: Salescn@RisngHF.com
Others: Saleswww@RisingHF.com

Part Number	MCU	TX Power (dBm)	AT Modem
RHF0M0E5-LF22	ROM 64~256KB / RAM 64KB	22dBm@LF (434/470MHz)	Yes
RHF0M0E5-HF14	ROM 64~256KB / RAM 64KB	14 dBm @HF (868MHz)	Yes
RHF0M0E5-HF22	ROM 64~256KB / RAM 64KB	22 dBm @HF (868/915MHz)	Yes

Table 5 Ordering Information

8 Revision

V1.6 2023-5-10
+ Add RHF0M0E5-HF14 performance parameters

V1.5 2023-2-2
+ Update module dimension tolerance in Package information

V1.4 2020-09-25
+ Update STM32WLE5 description
+ Update RHF0M0E5 Schematic diagram

V1.3 2020-05-06
+ Add RHF0M0E5-HF22 performance parameters
+ Update RHF0M0E5-LF22 performance parameters

V1.2 2020-03-03
+ Add STM32WLE5 description
+ Add Boot upgrade description

V1.1 2019-12-18
+ First draft

Please Read Carefully:

Information in this document is provided solely in connection with RisingHF products. RisingHF reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All RisingHF products are sold pursuant to RisingHF's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the RisingHF products and services described herein, and RisingHF assumes no liability whatsoever relating to the choice, selection or use of the RisingHF products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by RisingHF for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN RISINGHF'S TERMS AND CONDITIONS OF SALE RisingHF DISCLAIMS ANY EXPRESS OR IMPLIEDWARRANTY WITH RESPECT TO THE USE AND/OR SALE OF RisingHF PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIEDWARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWSOF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

RISINGHF PRODUCTS ARE NOT DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE RISINGHF PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER'S SOLE RISK, EVEN IF RISINGHF HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY RISINGHF AS BEING INTENDED FOR "AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL" INDUSTRY DOMAINS ACCORDING TO RISINGHF PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.

Resale of RisingHF products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by RisingHF for the RisingHF product or service described herein and shall not create or extend in any manner whatsoever, any liability of RisingHF.

RisingHF and the RisingHF logo are trademarks or registered trademarks of RisingHF in various countries.
Information in this document supersedes and replaces all information previously supplied.
The RisingHF logo is a registered trademark of RisingHF. All other names are the property of their respective owners.

© 2016 RISINGHF - All rights reserved

http://www.risinghf.com